


Semi-automatic key cutting machine with electronic regulation for all types of keys.

NOVACLAU



Hardened and protected stylus



Centring gauges



Reversible stylus



Tilting trolley



Micrometric regulation



Protective screen



Side brush



Hard chrome shaft



Trigger and spring



Locking of moving parts

CHARACTERISTICS

SOLSONA+


Composed of two parts.

One for flat cylinder keys, serrated keys, vehicle keys, cruciform keys and all types of keys with one bit, double bit, flat front pommel and round front pommel. Exclusive precision jaws, reversible in two positions on cylinder keys and four positions on bit keys. Adjustable, hardened and tempered, with protection and reversible on bit keys for copying the finest teeth. Hard chrome plated shafts for carriage movements. Gauges for the centring of any key. Key carriage with safety latch and approach spring. Tilting carriage for the finishing of bit keys. Accessories for male bit keys, Ford, Abloy, Abus, Muel, etc. Brush for key polishing. Transparent cutter protection. Safety switch. Double LED light inside. Chip collection drawer.

The other part for point, slot, tubular and special keys. Wide possibility of duplication with standard jaws. Couplings for all types of special keys. Work table and jaws-holder carriage mounted on linear bearings of high precision and smoothness. Manual locking of all moving parts. Stylus pre-approximation spring. Micrometric regulation stylus with milling cutter and stylus adjustment indicator lights. Internal LED work light with independent switch. Protective work screen. Self-centring milling cutter holder with high speed and precision. Any type of jaws can be adapted on request. Ford code system, etc.

Double socket to work with the two independent parts.

NOVACLAU

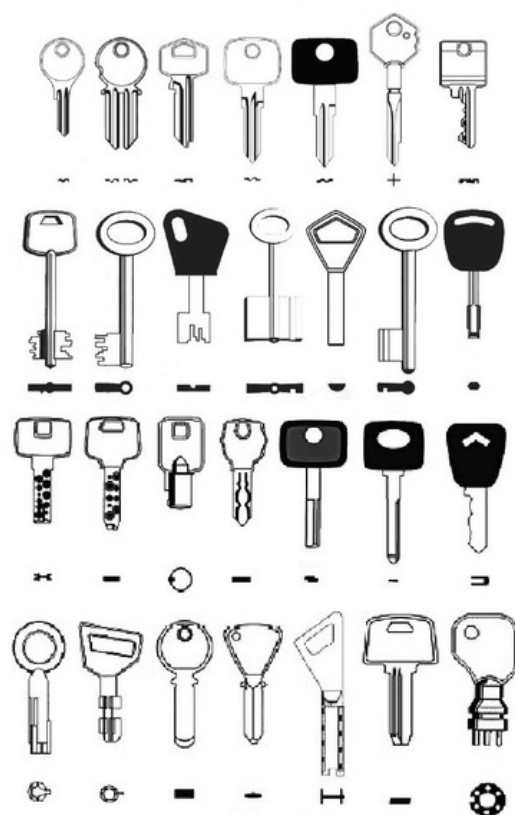

SOLSONA+

TECHNICAL DATA

Width: 62cm

Depth: 56cm

Height: 73cm

Weight: 62kg

Cutters: $\varnothing 80 \times 5 \times 16$ and $\varnothing 80 \times 1.5 \times 22$ mm HSS

Point cutters: various models according to keys


Motor: single-phase asynchronous 0.30Hp and 0.12Hp, 220V-50Hz.

CE standards.

Tel. (+34)93 309 78 50

novaclau@novaclau.com

www.novaclau.com

 (+34)651 82 69 21

Novaclau Maquinaria 2021, s.l.

Ctra. de Pontons s/n 08737 Torrelles de Foix - Barcelona (Espanya)